

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
13 May 2004 (13.05.2004)

PCT

(10) International Publication Number
WO 2004/039707 A1

(51) International Patent Classification⁷: **B65G 47/32,**
B65B 35/32

(21) International Application Number:
PCT/IB2003/004772

(22) International Filing Date: 28 October 2003 (28.10.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
BO2002A 000679 30 October 2002 (30.10.2002) IT

(71) Applicant (for all designated States except US): **I.M.A.
INDUSTRIA MACCHINE AUTOMATICHE S.p.A.**
[IT/IT]; Via Emilia 428-442, I-40064 Ozzano Emilia (IT).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **MALDINA,**

Lorenzo [IT/IT]; Via Martinelli 7, I-40133 Bologna (IT). **TEDESCHI, Giancarlo** [IT/IT]; Via Stanzano 105/A, I-40050 Gallo Bolognese di Castel S. Pietro (IT). **ORILLO, Antonio** [IT/IT]; Via della Bastia 4, I-40033 Casalecchio di Reno (IT).


(74) Agent: **DALL'OLIO, Giancarlo**; Invention S.a.s., Via delle Armi, 1, I-40137 Bologna (IT).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: A UNIT FOR TRANSFERRING AND SPACING ARTICLES

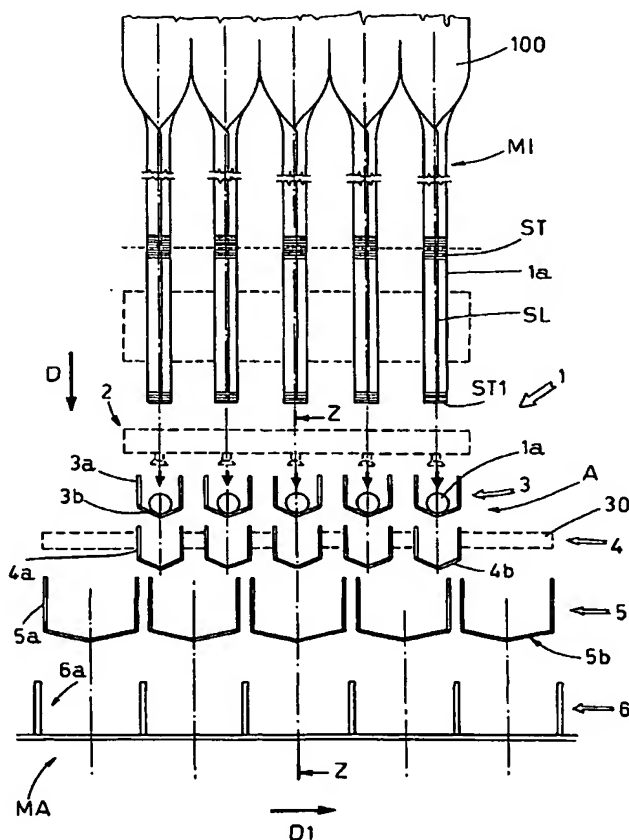

(57) Abstract: A unit (1) for transferring articles (1) from a machine (MI) for producing these articles to a packaging machine (MA), includes a plurality of means (4a) for receiving said articles (1a), said receiving means (4a) being situated between an outlet station (3) of said producing machine (MI) and an inlet station (6) of said packaging machine (MA); the receiving means (4a) are arranged at a variable distance from one another and move alternatively between a first working configuration (A), in which the receiving means (4a) are moved closer to each other, in order to be situated in the region of, and in registry with, said outlet station (3) of the producing machine (MI), so as to receive said articles (1a), and a second working configuration (B), in which the receiving means (4a) are moved far from each other, in order to be situated in the region of, and in registry with, said inlet station (6) of the packaging machine (MA), so as to transfer the articles (1a) to the inlet station (6).



European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*

- 1 -

A UNIT FOR TRANSFERRING AND SPACING ARTICLES

FIELD OF THE INVENTION

5 The present invention relates to a unit for transferring articles from a producing machine to a packaging machine.

In particular, the present invention is used during the manufacturing of articles employed in food production field and during the packaging of the articles into relative boxes and/or cases and/or cartons.

BACKGROUND OF THE INVENTION

The following description will refer explicitly to the production and packaging of the above articles, without losing its general character.

There are manufacturing or in-bagging machines, which fabricate welded tubular wrappings or bags of the type known as flow-pack, containing granular substances therein.

20 More in detail, the in-bagging machines produce bags beginning from a continuous sheet, of e.g. heat-weldable paper, which is preliminarily cut, so as to define a plurality of strips, vertically parallel.

Afterwards, each of the strips is brought to a tubular configuration by suitable folding means and then welded longitudinally along the edges.

25 In step relation with the longitudinal welding, the bottom of each vertical strip is also welded and afterwards, a measured quantity of the predetermined

- 2 -

granular or powder substance is filled into the flow-pack.

When the filling is completed, each strip is welded again at top and cut near the median line of the welded
5 portion, so as to detach it from the continuous sheet and to define the bottom of a subsequent tubular structure.

The so obtained sealed tubular bags, usually arranged one beside another in longitudinal vertical configuration, are withdrawn at the outlet portion of the in-bagging
10 machine by suitable withdrawing and transferring means (for example by conventional suction means known as "pick and place"), and later fed, arranged longitudinally horizontally, to corresponding hoppers of an outlet station of the bag filling machine.

15 After the bags have been placed in the hoppers, the bottom of the hoppers are opened, so that the tubular bags are released to fall into corresponding boxes of a box conveyor, which constitutes an inlet portion of a packaging machine, aimed at packaging groups of bags into
20 cases.

In order to ensure best and efficient transferring of the sealed tubular bags from the bagging machine to the packaging machine, the distance between the axes of two consecutive hoppers, or step, must be substantially equal
25 to the corresponding step of the box-compartments of the packaging machine conveyor.

In this way, a correct filling of the conveyor box-compartments with a predetermined number of tubular bags is ensured.

30 Therefore, according to the above described known method, when the size of the tubular bags is changed, that is when one wants to produce tubular bags of different

- 3 -

transverse dimensions, the step between the above
hoppers, i.e. the distance between the hoppers, must be
changed, and consequently, the step or distance between
different box-compartments of the packaging machine
5 conveyor must be adjusted and changed.

As it is easily understood, such changes result in
difficult and complicated adjustment work, which causes
long downtimes.

10 SUMMARY OF THE INVENTION

The object of the present invention is to overcome the
drawbacks and solve the problems of the above described
prior art.

According to the present invention, a unit is
15 manufactured for transferring articles from a producing
machine to a packaging machine, and is characterized in
that it includes a plurality of means for receiving said
articles, said receiving means being situated between an
outlet station of said producing machine and an inlet
20 station of said packaging machine; said receiving means
being arranged at a variable distance from one another
and moving alternatively between a first working
configuration, in which the receiving means are moved
closer to each other, in order to be situated in the
25 region of, and in registry with, said outlet station of
the producing machine, so as to receive said articles,
and a second working configuration, in which the
receiving means are moved far from each other, in order
to be situated in the region of, and in registry with,
30 said inlet station of the packaging machine, so as to
transfer the articles to the inlet station.

- 4 -

BRIEF DESCRIPTION OF THE DRAWINGS

The characteristic features of the invention will be pointed out in the following description of a preferred, but not only embodiment, with particular reference to the
5 enclosed figures, in which:

- Figure 1 is a schematic front, partially sectional view of a preferred embodiment of the transferring unit proposed by the present invention, with some parts removed for sake of clarity;
- 10- Figures 2, 3, 4 and 5 are front views of the same unit of Figure 1 in different and subsequent working positions.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

- 15 With reference to Figure 1, the reference number 1 indicates a unit for transferring tubular bags 1a from a bagging machine MI to an inlet station 6, defined by a conveyor 6, of a packaging machine MA.

Each of the bags 1a contains preferably a granular or in-
20 powder product (not shown). The bags are produced in a known way by the machine MI, beginning from a continuous sheet of a wrapping material 100. The wrapping material is cut or scored and closed with a longitudinal welding line SL and two crosswise welding lines ST and ST1 at the
25 opposite ends of the so formed bag 1a. This kind of bag is known as the flow-pack.

According to Figure 1, the bagging machine MI includes pickup means 2 which pick up, according to known technique, groups of tubular bags 1a arranged vertically,
30 that is with the longitudinal welding lines SL arranged

- 5 -

vertically parallel to a vertical direction D of the Figure 1.

The pick up means drop the groups of tubular bags in horizontal configuration, that is with the longitudinal
5 welding lines SL arranged horizontally and crosswise to the direction D, into a plurality of discharge buckets 3a of an outlet station s of the bag producing machine MI.

The discharge buckets 3a are preferably defined by
hoppers 3a. The bottom ends 3b of the hoppers can be
10 opened and are arranged at a fixed distance one from the other, as a function of the size of the tubular bags 1a, in particular of the transverse dimension of the bags 1a.

The unit 1, proposed by the present invention, includes a conveying line 4, situated downstream of the outlet
15 station 3 of the bag making machine MI and equipped with a plurality of mobile buckets 4a. The distances between the axes of the mobile buckets, or step, can be varied.

A terminal line 5, situated in cascade with respect to the direction D, includes a plurality of terminal buckets
20 5a, arranged at fixed distances from one another and facing, each one, a relative box-compartment 6a of the inlet conveyor 6 of the packaging machine MA.

According to Figures from 1 to 5, the mobile buckets 4a are preferably defined by hoppers 4a; the bottom ends 4b
25 of the mobile buckets can be opened. In operation, the distance between the axes of the mobile buckets 4a is changed from a receiving configuration A, in which the buckets 4a are situated each one below, and in registry with a relevant discharge hopper 3a, in order to receive
30 the tubular bags 1a falling from the bottoms 3b (Figure 2) being opened, to a release configuration B, in which each bucket 4a is situated above, and in registry with a

- 6 -

relevant terminal bucket 5a, in order to drop the tubular bags 1a into the buckets 5a.

In order to allow the variable distance configuration of the hoppers 4a of the line 4, the hoppers 4a are slidably
5 mounted on guides 30 (shown with broken line in Figures from 1 to 5), and are moved by motors, known and not shown, for example brush-less motors, so as to define and realize an alternate expansion/compression or pantographic movement.

10 More in detail, the mobile hoppers 4a are moved alternately far from and close to one another in relation to a plane Z substantially orthogonal to the working line 4 and to a movement direction D1 of the conveyor 6 (Figure 1).

15 Still according to the enclosed figures, the buckets 5a of the terminal line 5 are likewise preferably defined by hoppers 5a having bottom ends 5b, which can be opened, and situated at a fixed distance from one another.

The distance can be suitably adjusted in relation to the
20 size of the box compartments 6a of the conveyor 6, however independently from the size of the tubular bags 1a.

In particular, the distances between the axes of the hoppers 4a in the receiving configuration A are equal to
25 the distances between the axes of the discharge hoppers 3a, situated above, and likewise, the distance between the axes of each pair of adjacent hoppers 4a in the release configuration B is preferably equal to the distance or step between the axes of the pairs of
30 terminal hoppers 5a, situated below.

According to Figure 2, in case the conveyor 6 of the machine MA is moved stepwise, the terminal hoppers 5a of

- 7 -

the terminal line 5 can mounted on a support 50 (shown with broken line in Figure 2), stationary with respect to the outlet station 3 of the bag making machine MI.

Otherwise, if the conveyor 6, equipped with box
5 compartments 6a, moves continuously, the correct drop of the tubular bags 1a into the box compartments 6a is ensured by mounting the terminal hoppers 5a on a movable support 50, e.g. of the known follow-type, sliding with respect to the outlet station 3, in step relation with
10 and at the same speed as the conveyor 6.

The operation of the unit 1 will be described in the following with reference to an operation step, in which the pickup means 2 have already dropped single bags 1a, in horizontal configuration, into each discharge hopper
15 3a.

In time relation with the drop of one tubular bag 1a into each discharge hopper 3a, the mobile hoppers 4a are moved to the receiving configuration A by compacting them slidingly along the guides 30, (Figure 1). In this
20 configuration, the bottoms 3b of the hoppers 3a open, so as to make the bags 1a fall directly into the hoppers 4a (Figure 2).

At this point, the hoppers 4a are moved in relative expansion along the guide 30 up to the release
25 configuration B (Figure 3), so as to be arranged exactly above the terminal hoppers 5a of the terminal line 5, and in such a way that, when the respective bottom ends 4b open, the bags 1a situated inside the hoppers 4a are free to fall into the respective terminal hoppers 5a (Figure
30 4).

As it is better seen in Figure 3, as soon as the tubular bags 1a are released from the outlet station 3 to the

- 8 -

hoppers 4a, the discharge hoppers 3a are ready to receive subsequent bags 1a produced continuously by the bag machine MI.

Likewise, as soon as the mobile hoppers 4a drop the
5 tubular bags 1a, the same hoppers 4a are moved again, with a compression movement, to the receiving configuration A, waiting for tubular bags 1a, which will be released from the discharge hoppers 3a (Figure 5), according to a continuous repetition of the production
10 cycle.

When the bags 1a have reached the hoppers 5a, the bottoms 5b of the terminal hoppers 5a are opened, so that the bags fill the box-compartments 6a of the packaging machine MA conveyor 6.

15 In case the conveyor 6 is operated in a continuous motion, as soon as a predetermined number of tubular bags 1a are collected within each one of the terminal hoppers 5a, the moving support 50 is first driven so as to follow the box-compartments 6a, into which the hoppers 5a can
20 release the bags 1a, and then it is made return with a backward motion up to a position corresponding to the release configuration B of the mobile hoppers 4a.

In the last case, the tubular bags 1a are released into to boxes 6a is obtained by keeping the terminal hoppers
25 5a in registry with the boxes 6a.

The so described unit 1 is used without substantial changes to transfer tubular bags 1a of different dimensions from the machine MI to the machine MA.

In fact, it is enough to adjust, by a simple operation,
30 only the respective strokes which the mobile hoppers 4a run during the passage from the receiving configuration A, in which they are situated below the discharge hoppers

- 9 -

3a, to the release configuration B, in which they are situated above the terminal hoppers 5a.

Therefore, the proposed unit 1 allows quick and simple change-over operation, when the size of the articles
5 being packaged is changed, thus reducing substantially the downtimes and therefore increasing the overall production rate.

In particular, according to the preferred embodiment, there are provided five mobile hoppers 4a, (that is an
10 odd number of hoppers) and therefore, the central hopper 4a remains stationary, while the lateral hoppers are moved, so as to be set in registry either with the discharge hoppers 3a or with the terminal hoppers 5a, whichever is the case in accordance with the operation
15 step.

The terminal hoppers 5a have suitable dimensions, which allow to release into the box-compartments 6a, underlying the terminal hoppers 5a, a number of tubular bags 1a, which varies within a wide range.

20 It is also to be pointed out that in this case, each group of hoppers 3a, 4a and 5a (discharge, mobile for transferring and terminal) when considered in vertical, feed a selected series of boxes 6a. Therefore, it is particularly easy to detect and correct possible wrong
25 operation, for instance when an incorrect number of bags is contained in a box-compartment or the total weight of the bags contained in a box-compartment does not match the expected value. The verify can be easily performed by checking the cases packaged in the packaging machine MA
30 and the correction can be effected directly upstream of the machine MA, acting on the vertical group of hoppers

- 10 -

through which the bags are transferred from the machine MI to the machine MA.

Likewise, it is possible to perform a verify also in the case when faults and/or problems on a defined vertical group of hoppers are found, thus being possible to reject
5 only packs containing the bags fed and transferred by this vertical group of hoppers.

According to alternative variants (not shown), it is possible to provide only one working line, e.g. conveying
10 line 4, which can receive tubular bags 1a from the outlet station 3 of the bag making machine MI and can position them directly into the boxes of the conveyor 6 of the machine MA, without interposing the terminal line 5.

According to still another variant of the proposed
15 transferring unit 1, the working line 4 receives articles directly from the withdrawing means 2 connected to the bag making machine MI, that is without interposing the discharge hoppers 3a.

- 11 -

CLAIMS

1. A unit (1) for transferring articles (1) from a machine (MI) for producing these articles to a packaging machine (MA), the unit being characterized in that it includes a plurality of means (4a) for receiving said articles (1a), said receiving means (4a) being situated between an outlet station (3) of said producing machine (MI) and an inlet station (6) of said packaging machine (MA); said receiving means (4a) being arranged at a variable distance from one another and moving alternatively between a first working configuration (A), in which the receiving means (4a) are moved closer to each other, in order to be situated in the region of, and in registry with, said outlet station (3) of the producing machine (MI), so as to receive said articles (1a), and a second working configuration (B), in which the receiving means (4a) are moved far from each other, in order to be situated in the region of, and in registry with, said inlet station (6) of the packaging machine (MA), so as to transfer the articles (1a) to the inlet station (6).

2. A unit according to claim 1, characterized in that said receiving means (4a) are mounted moving on guide means (30), in order to alternatively compress/expand with respect to one another, under the action of motor means.

3. A unit according to claim 1 or 2, characterized in that said receiving means (4a) include a plurality of hoppers (4a) equipped with bottoms (4b), which can be


- 12 -

opened; said hoppers (4a), being movable to said first working configuration (A), where they take positions corresponding and in registry with respective stationary hoppers (3a) placed at fixed mutual distances at said outlet station (3), and movable to said second working configuration (B), where they take positions corresponding and in registry with respective stationary hoppers (5a) placed at fixed mutual distances and belonging to an operative terminal line (5); said terminal line (5) being situated between said receiving means and said inlet station (6) and the relevant hoppers (5a) are so located to match corresponding box-compartments (6a) of a box-conveyor (6) of said inlet station.


4. A unit according to claim 1 or 2, characterized in that said receiving means (4a) include a plurality of mobile hoppers (4a) with bottoms which can be opened, said mobile hoppers (4a) being capable of moving to said first working configuration (A), in which the mobile hoppers correspond and are in registry with corresponding hoppers (3a) of said outlet station (3), and moving to said second working configuration (B), in which the relevant bottoms (4b) of said mobile hoppers correspond to and are in registry with respective box-compartments (6a) of a box-conveyor (6) of said inlet station (6).

5. A unit according to claim 3, characterized in that said operative terminal line (5) is mounted on a mobile support (50) in order to be moved at the same speed as said box-conveyor (6) of said inlet station (6) of the packaging machine (MI)


1/5

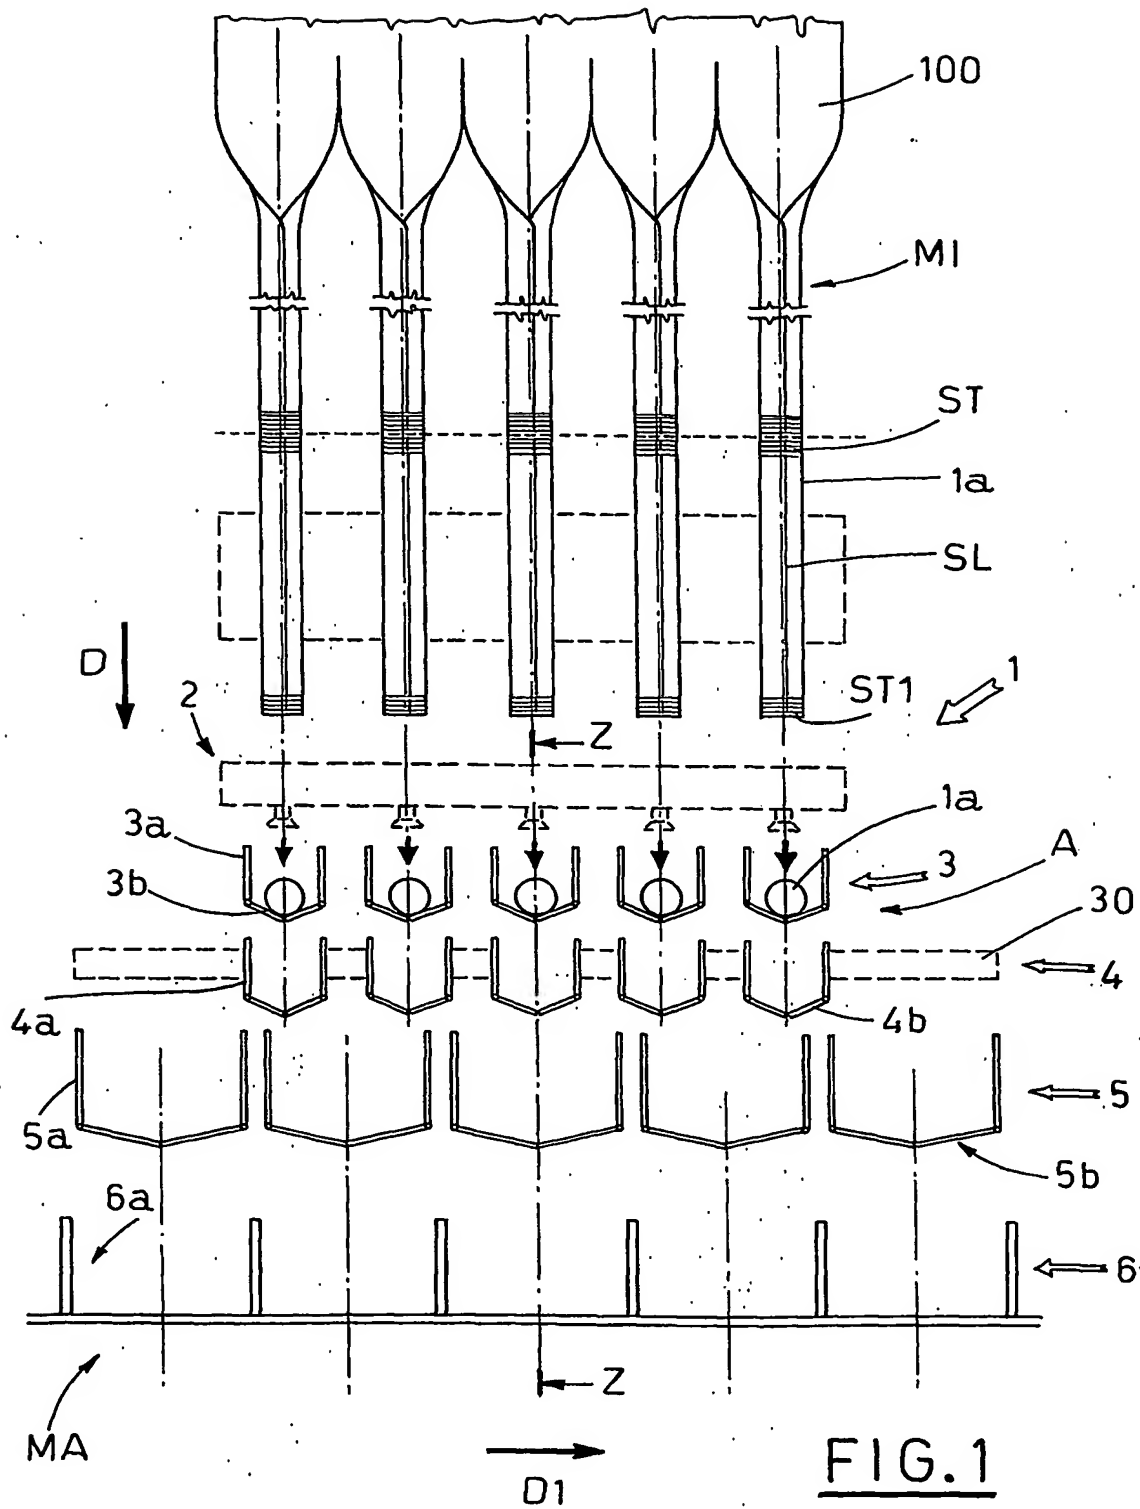


2 / 5

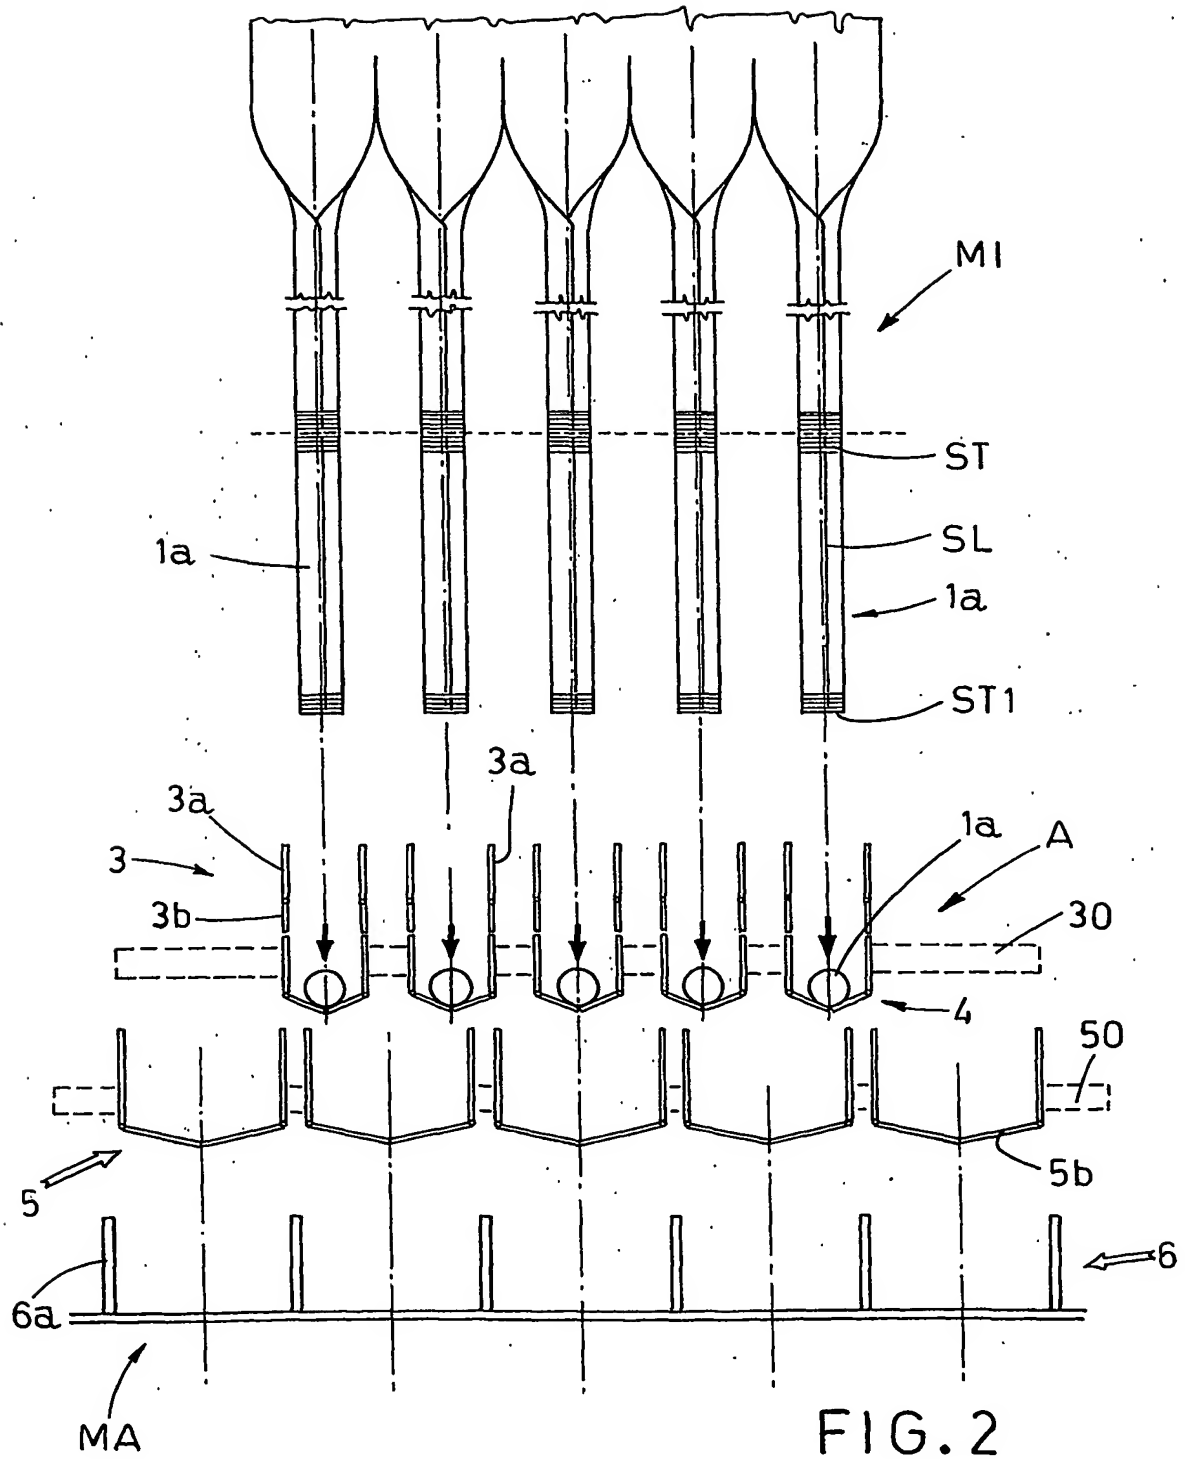


3/5

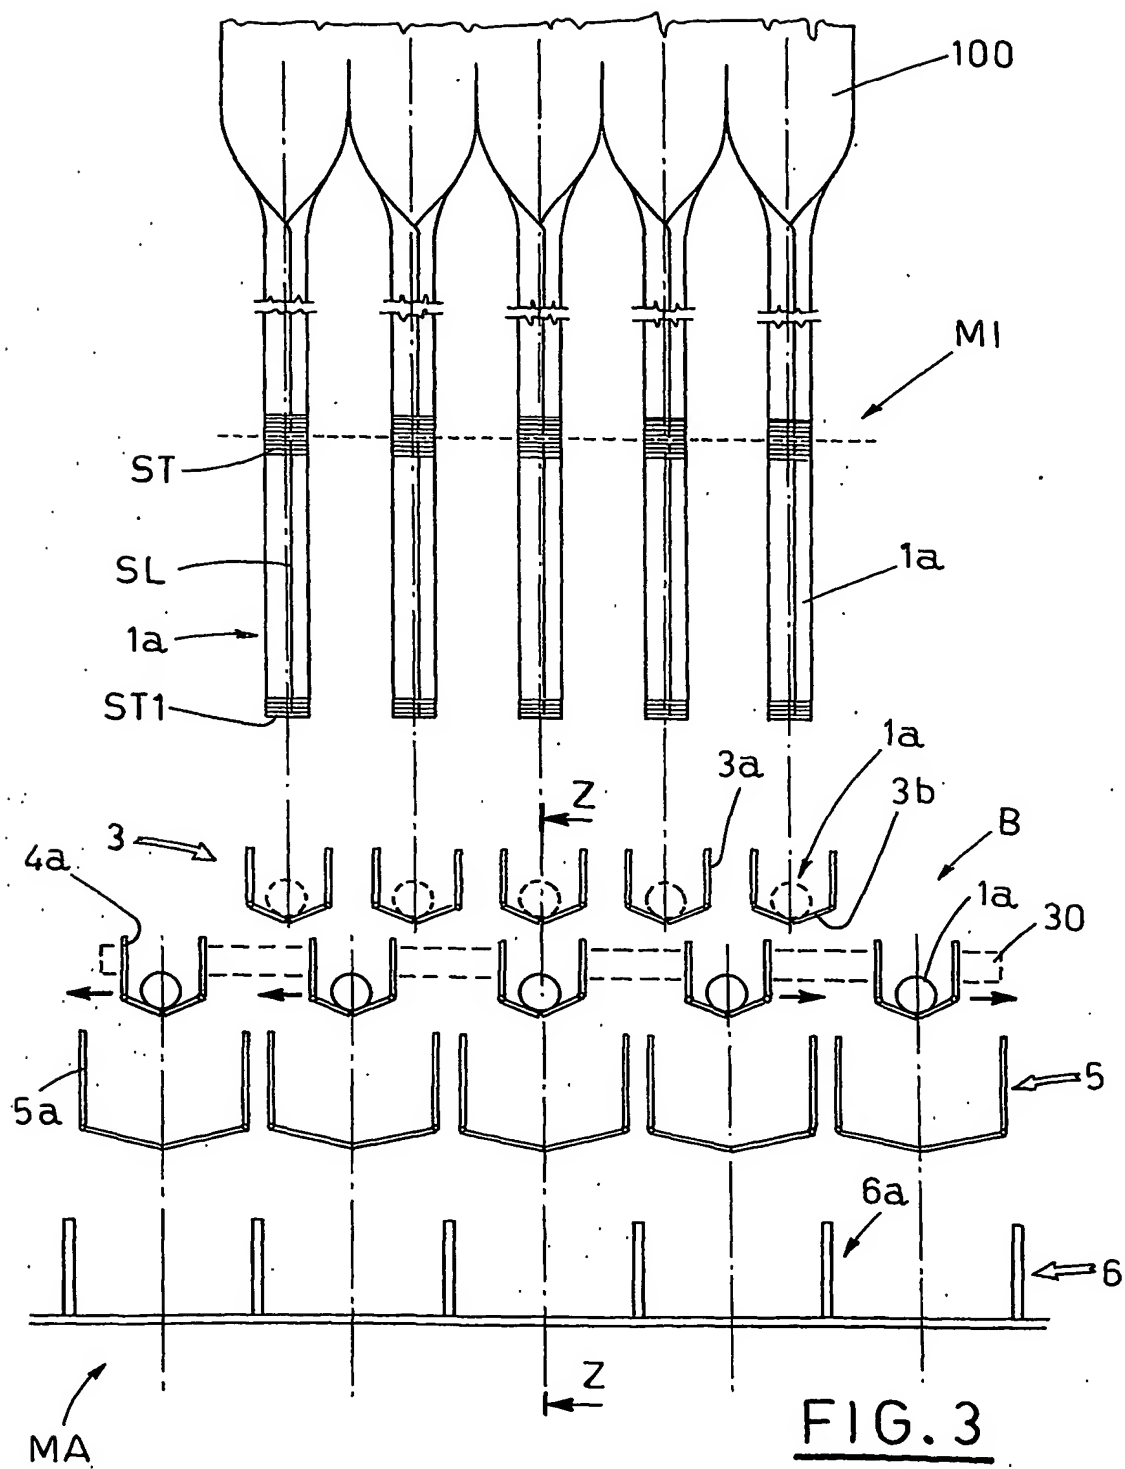

4/5

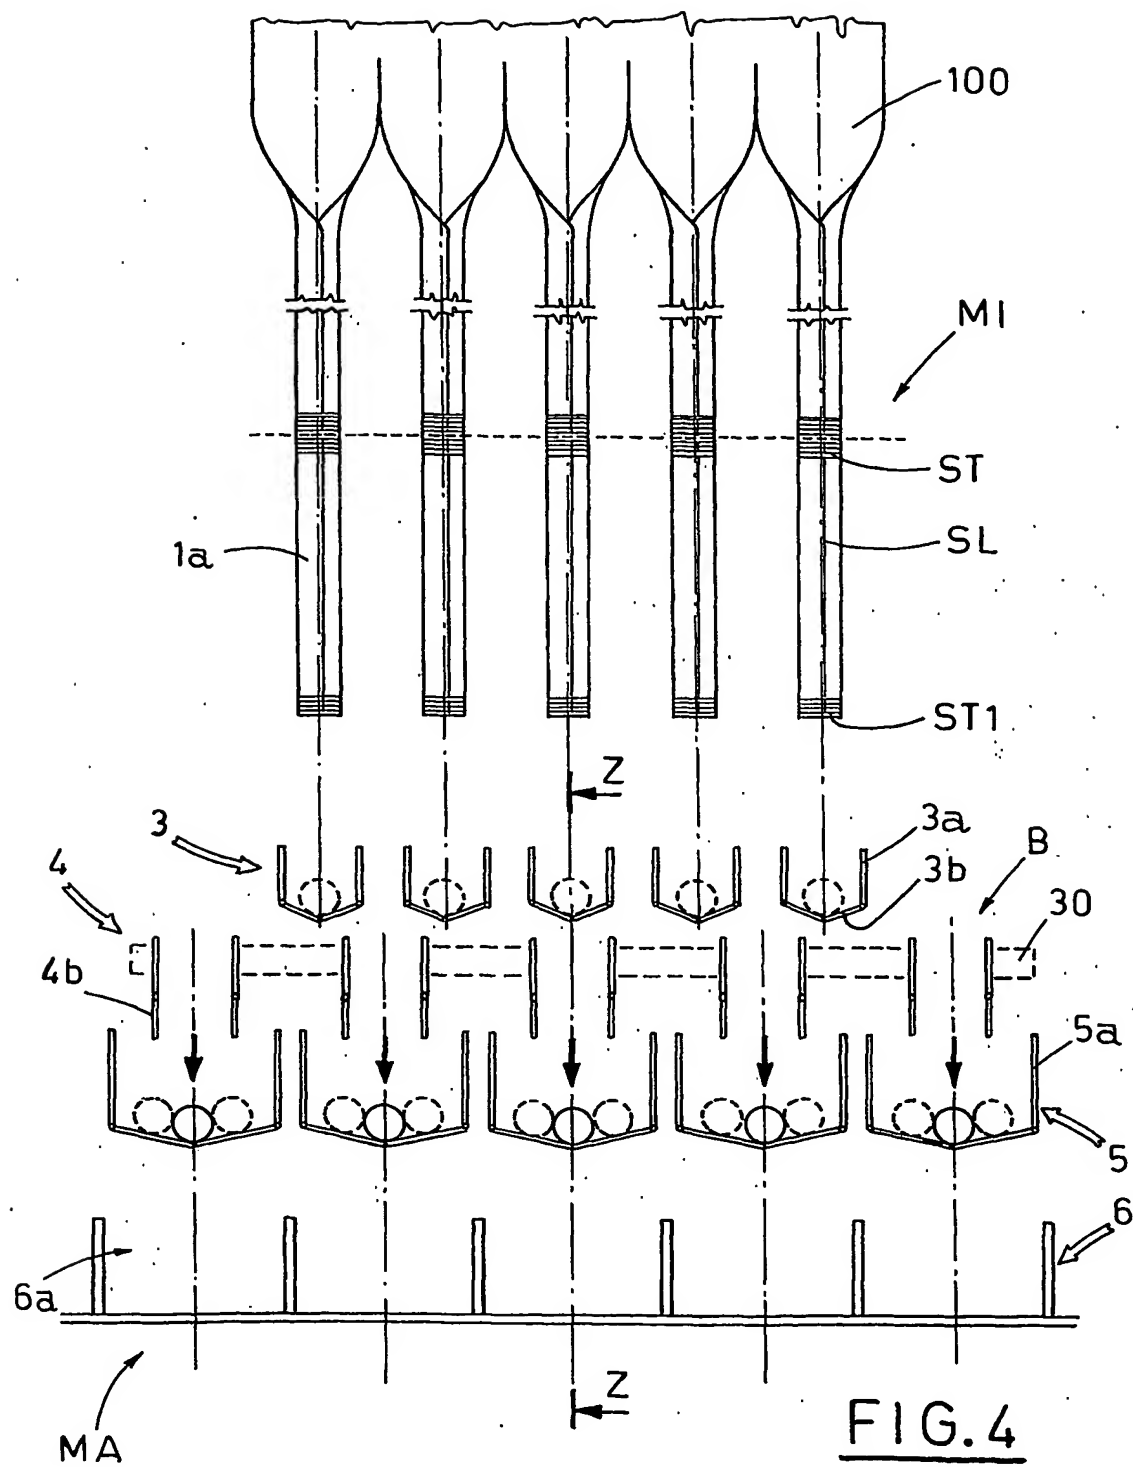

5/5

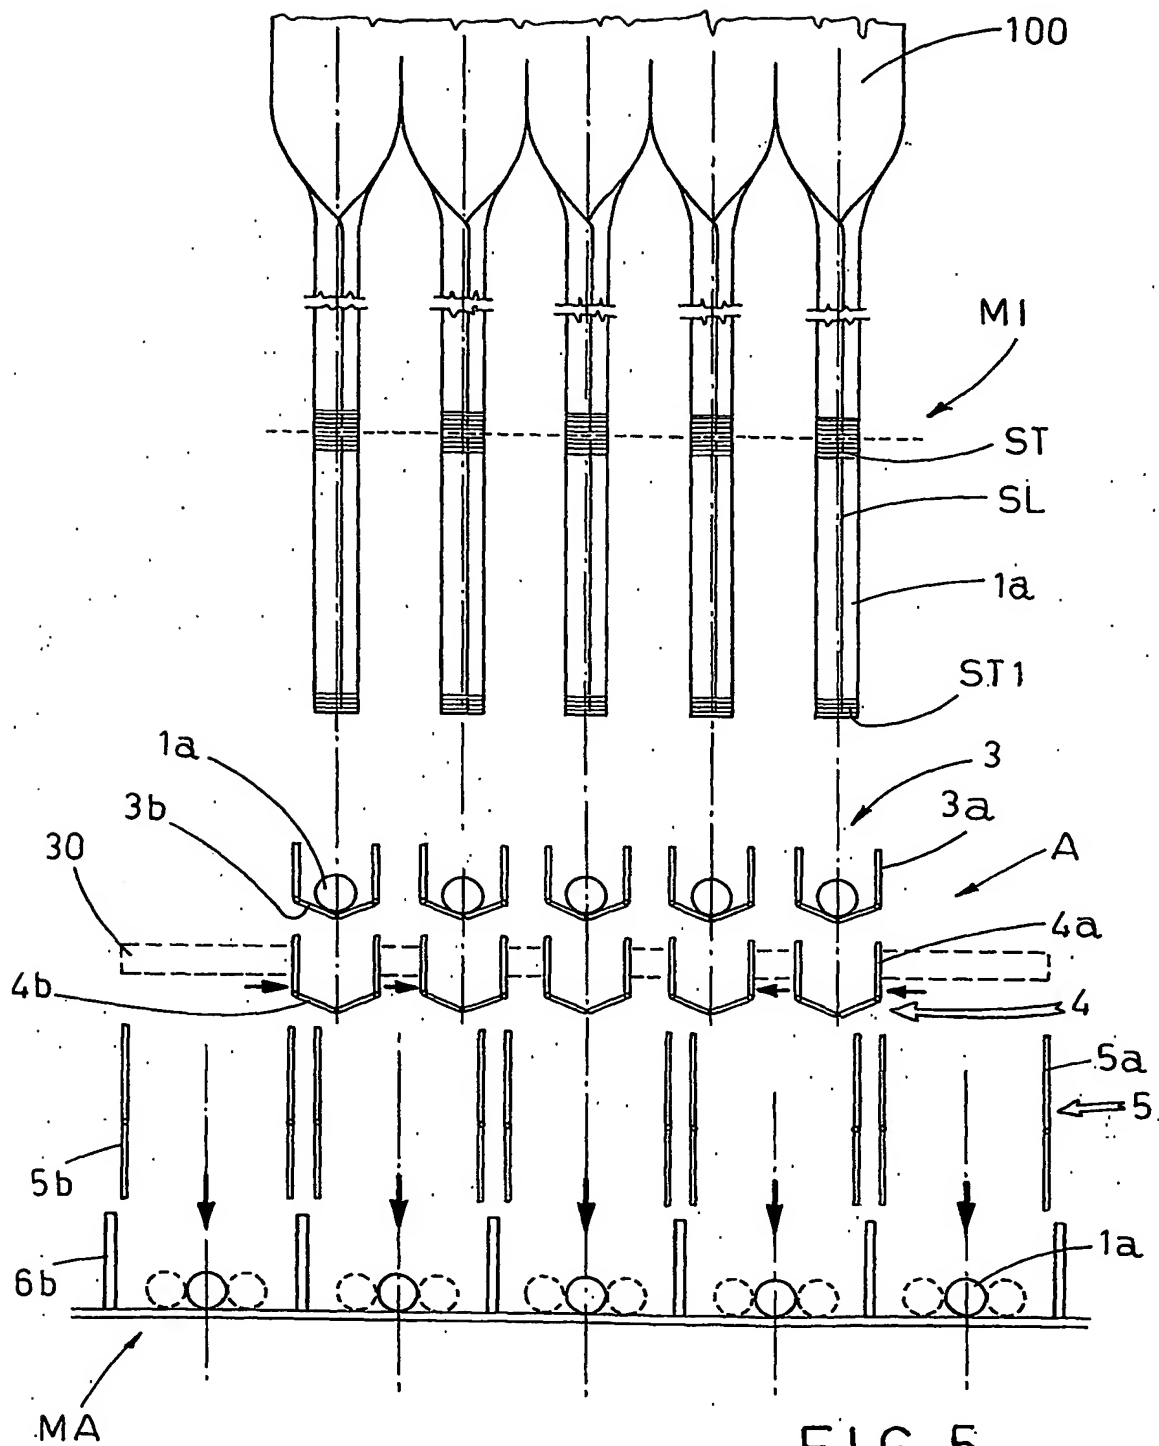

INTERNATIONAL SEARCH REPORT

PCT/IB 03/04772

A. CLASSIFICATION OF SUBJECT MATTER
 IPC 7 B65G47/32 B65B35/32

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B65G B65B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 065 586 A (SOLERT HANS JUERGEN ET AL) 23 May 2000 (2000-05-23) claim 1; figures 4,5	1,2
Y	---	4
X	EP 0 440 848 A (BARILLA FLLI G & R) 14 August 1991 (1991-08-14) column 1 -column 2, line 28; figure 1	1,2
X	PATENT ABSTRACTS OF JAPAN vol. 009, no. 055 (M-362), 9 March 1985 (1985-03-09) -& JP 59 190110 A (FUJIO ASAI), 27 October 1984 (1984-10-27) abstract	1,2
	--- -/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

& document member of the same patent family

Date of the actual completion of the international search

18 February 2004

Date of mailing of the international search report

25/02/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax (+31-70) 340-3016

Authorized officer

Grentzius, W

INTERNATIONAL SEARCH REPORT

PCT/IB 03/04772

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 3 964 233 A (THOMAS LESLIE P) 22 June 1976 (1976-06-22) figures 5,8	4
A	-----	3,5

INTERNATIONAL SEARCH REPORT

PCT/IB 03/04772

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 6065586	A	23-05-2000	AU 4552797 A	19-03-1998
			DE 69708124 D1	13-12-2001
			DE 69708124 T2	11-04-2002
			WO 9808758 A1	05-03-1998
			EP 0923498 A1	23-06-1999
			ES 2167795 T3	16-05-2002
			ID 18302 A	26-03-1998
EP 0440848	A	14-08-1991	CA 2010457 A1	20-08-1991
			EP 0440848 A1	14-08-1991
			AT 83464 T	15-01-1993
			DE 69000609 D1	28-01-1993
			DE 69000609 T2	13-05-1993
			DK 440848 T3	03-05-1993
			ES 2036850 T3	01-06-1993
			GR 3006924 T3	30-06-1993
JP 59190110	A	27-10-1984	JP 1826417 C	28-02-1994
			JP 5032291 B	14-05-1993
US 3964233	A	22-06-1976	AU 7217374 A	12-02-1976
			BE 819232 A1	27-02-1975
			CA 1001593 A1	14-12-1976
			CA 1016509 A2	30-08-1977
			DE 2438440 A1	20-11-1975
			DK 424574 A	16-11-1975
			FR 2271126 A1	12-12-1975
			GB 1452655 A	13-10-1976
			IT 1017489 B	20-07-1977
			JP 50146490 A	25-11-1975
			NL 7410180 A	18-11-1975